


# Specification

**Product: LED Perforated Lamp**

**Applications:**

Suitable for 2~5cm light spacing of perforated channel letter and advertising signage.

Model : ALEDR112

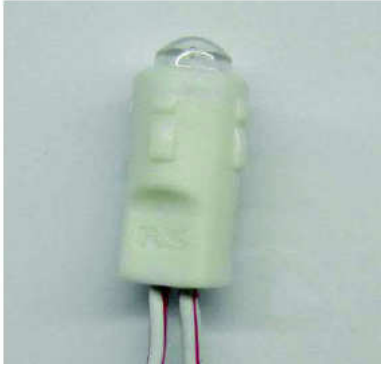

**Features:**

1. Adopt 2835 SMD LED, long life, low attenuation,
2. Cascade quantity up to 50pcs
3. Molding with lens, uniform light, waterproof, dustproof, anti-UV.
4. Product compliant with CE, RoHS and Bureau of Quality Supervision report

**Installation:**

1. Installed by installation clip.
2. Cut on wire between every module,

**Warranty:**

3ears or 13000 hours, whichever comes first.

Optical and Electrical parameters:

PRODUCT NO.	LED COLOUR	Colour Temperature (K)	Beam Angle (deg)	Luminous Flux (lm / piece)	CRI Ra	Luminous Efficiency (lm/W)	Working Voltage (V DC)	Working Current (mA / piece)	Power (W / piece)
ALEDR112 DL	ULTRA DAYLIGHT	9000	150	8.5	≥75	53.1	12	13	0.16

Others:

PRODUCT NO.	LED COLOUR	Standard Qty per string (pcs)	Single-end power feed (pcs)	Double-end power feed (pcs)	Module weight / LED (g/piece)	Operating temperature (C)	Storage Temperature (C)	IP Grade
ALEDR112DL	ULTRA DAYLIGHT	50	50	100	3.48	-25 ~ +60	-25 ~ +70	IP66

Remarks:


Testing environment temperature 25±2 C

The above data are typical values; the actual data for each single product could differ from the typical values.

The data subject to change without notice.

## Profile Drawings:

unit: mm [in]

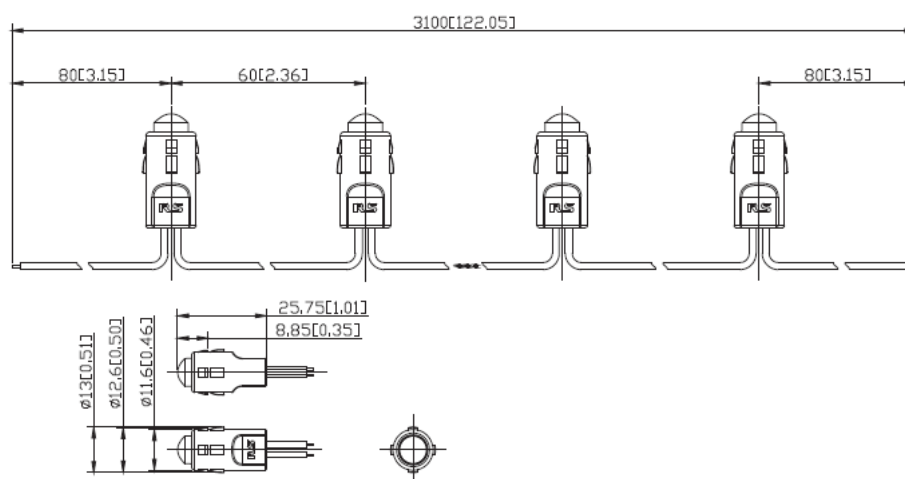

## Light distribution

